




HIGH BAY LAMP SERIES

WITH OPTIONAL:

TRANSPARENT POLYCARBONATE (OR) TEMPERED GLASS COVER
VACCUM-METALIZED (OR) NANO-COATING REFLECTOR



Ideal lighting solutions for airports and various transportation stations, sports venues, warehouses and workshops.

These UL-certified high bay lamps offer high-output and high-efficiency, do not require maintenance, and provide a remarkable color-rendering index.



Features

- Lightning-proof protection design, able to withstand up to 20KV interference.
- Equipped with 40W-300W round tube induction lamp providing efficient, long life, excellent color rendering, and stable lighting.
- Durable die-cast aluminum electrical box, high-temperature baked
- Corrosion resistant.
- Inner heat-resistant vacuum-coated reflector, effectively increases reflection space up to 90%.
- Integrated ballast and lamp design allows easy installation, maintenance, efficient cooling, and greater life between services.
- Energy efficient, reduces maintenance costs, and is environmentally friendly.
- Various dimming options available.

Manufacture Details

- ADC 12 die-cast aluminum
- High-temperature baked, corrosion-resistant coated lamp body
- 200°C resistant vacuum coated diffuser
- High-transmittance tempered glass cover.
- Silicone sealing ring.
- High-strength AA 6063 architectural aluminium hasp



Product App. Images (models 066 L, 226 R & 228 Top)

Wyde Loyal Development Ltd.

Los Angeles, CA

Seattle, WA




Vancouver, BC

Mexico, DF

US & Canada: 13160 Vanier Pl. unit 160 / Richmond BC / V6V 2J2 / Canada / website: www.wideloyal.com / Mexico: (55) 5351-5339
1888-303-0931 (Toll Free). +1 (604) 303-0931 Fax +1 (604) 303-0932


High Bay Lamp DH-EL228P (A,B,C,D) with Polycarbonate Cover and Nano-coating Reflector

Lamp Size Unit: (mm)

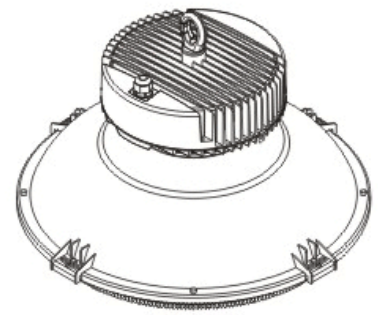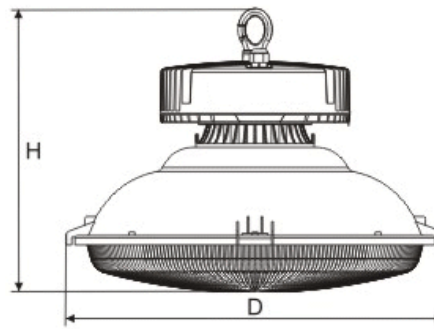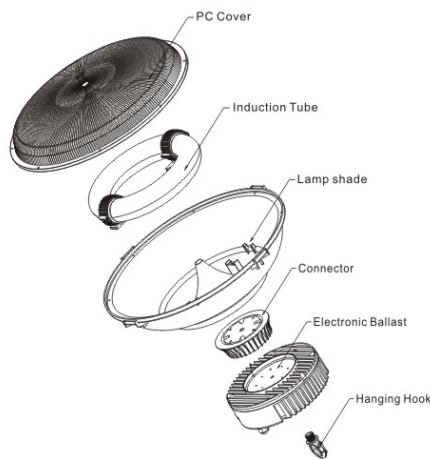


Model S C	Power (W)	D (mm)	H (mm)
DH-EL228-P A	40-60	Ø358	351
DH-EL228-P B	80-100	Ø399	351
DH-EL228-P C	120-150	Ø478	372
DH-EL228-P D	200	Ø506	385


Installation Diagram :



Hanging chain installation

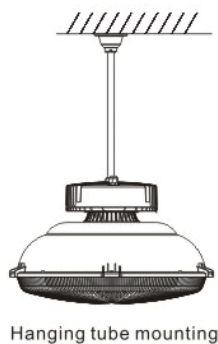


Hanging tube mounting



Wall mounting

Light Distribution Curve:

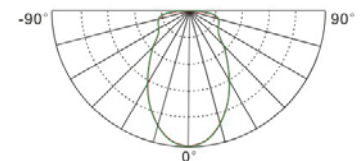

Technical Data



Product	DH-EL228 P Polycarbonate Cover - High Bay Lamp Series						
Wattage (W)	40	60	80	100	120	150	200
Model Size Category	DH-EL228-P A		DH-EL228-P B		DH-EL228-P C		DH-EL228-P D
Luminous Flux (Im)	2800	4500	6400	8000	9600	12000	16000
Voltage (V)	AC100-277V 50Hz/60Hz						
Current 220V (A)	0.2	0.3	0.39	0.49	0.58	0.73	0.96
Current 110V (A)	0.4	0.6	0.78	0.98	1.16	1.46	1.92
Ballast Consumption (W)	4	5	6	7.5	8.5	10	11.5
Power Factor	0.9		0.95		0.98		
Color Temperature	Standard color temperature of 5000K, other -additional- conventional color temperatures to be ordered: 2700K/4000K/6500K						
Ambient Temperature	Standard products working at -25°C / 50°C						
IP Rated	IP66						
Dimming	Timing dimming or dimming external trigger terminal.						
Product Size (mm)	Ø358 X 351		Ø399 X 351		Ø478 X 372		Ø506 X 385
Carton Size (cm)	42 X 42 X 36		46 X 46 X 36		53.5 X 53.5 X 37.5		54X54X37.5
Net Weight (kg)	5	5	5.6	5.7	5.87	5.87	7.45
Gross Weight (kg)	7	7	7.8	7.8	8.4	8.4	9.78
Model No.	DH-EL228-P04	DH-EL228-P06	DH-EL228-P08	DH-EL228-P10	DH-EL228-P12	DH-EL228-P15	DH-EL228-P20



Wyde Loyal Development Ltd.

Los Angeles, CA

Seattle, WA




Vancouver, BC

Mexico, DF

US & Canada: 13160 Vanier Pl. unit 160 / Richmond BC / V6V 2J2 / Canada / website: www.wideloyal.com / Mexico: (55) 5351-5339
1888-303-0931 (Toll Free). +1 (604) 303-0931 Fax +1 (604) 303-0932


High Bay Lamp DH-EL228T (A,B,C,D) with Transparent Polycarbonate Cover and Nano-coating Reflector

Lamp Size Unit: (mm)

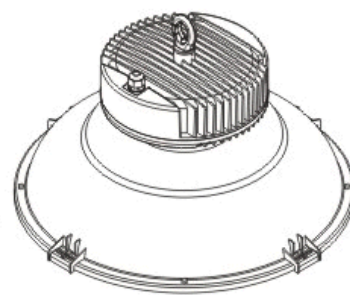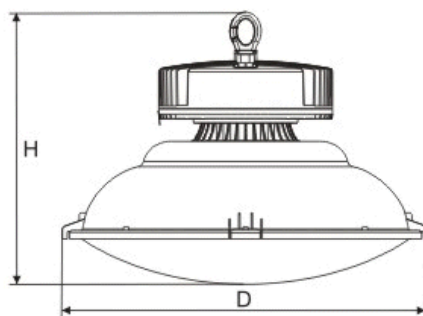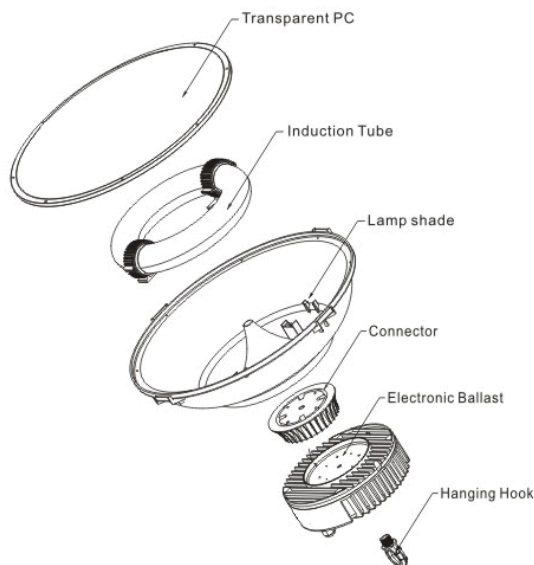


Model S C	Power (W)	D (mm)	H (mm)
DH-EL228T A	40-60	Ø358	351
DH-EL228T B	80-100	Ø399	351
DH-EL228T C	120-150	Ø478	372
DH-EL228T D	200	Ø506	385


Installation Diagram :



Hanging chain installation




Hanging tube mounting



Wall mounting

Light Distribution Curve:

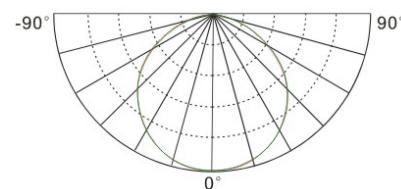

Technical Data



Product	DH-EL228 T Transparent Polycarbonate Cover - High Bay Lamp Series						
Wattage (W)	40	60	80	100	120	150	200
Model Size Category	DH-EL228T A		DH-EL228T B		DH-EL228T C		DH-EL228T D
Luminous Flux (Im)	2800	4500	6400	8000	9600	12000	16000
Voltage (V)	AC100-277V 50Hz/60Hz						
Current 220V (A)	0.2	0.3	0.39	0.49	0.58	0.73	0.96
Current 110V (A)	0.4	0.6	0.78	0.98	1.16	1.46	1.92
Ballast Consumption (W)	4	5	6	7.5	8.5	10	11.5
Power Factor	0.9		0.95		0.98		
Color Temperature	Standard color temperature of 5000K, other -additional- conventional color temperatures to be ordered: 2700K/4000K/6500K						
Ambient Temperature	Standard products working at -25°C / 50°C						
IP Rated	IP66						
Dimming	Timing dimming or dimming external trigger terminal.						
Product Size (mm)	Ø358 X 351		Ø399 X 351		Ø478 X 372		Ø506 X 385
Carton Size (cm)	42 X 42 X 39		46 X 46 X 39		53.5 X 53.5 X 42		54 X 54 X 42
Net Weight (kg)	5	5	5.6	5.7	5.87	5.87	7.45
Gross Weight (kg)	7	7	7.8	7.8	8.4	8.4	9.78
Model No.	DH-EL228-T04	DH-EL228-T06	DH-EL228-T08	DH-EL228-T10	DH-EL228-T12	DH-EL228-T15	DH-EL228-T20



Wyde Loyal Development Ltd.

Los Angeles, CA

Seattle, WA




Vancouver, BC

Mexico, DF

US & Canada: 13160 Vanier Pl. unit 160 / Richmond BC / V6V 2J2 / Canada / website: www.wideloyal.com / Mexico: (55) 5351-5339 1888-303-0931 (Toll Free). +1 (604) 303-0931 Fax +1 (604) 303-0932

High Bay Lamp DH-EL228G (A,B,C,D,E) with Tempered Glass Cover and Nano-coating Reflector

Lamp Size Unit: (mm)

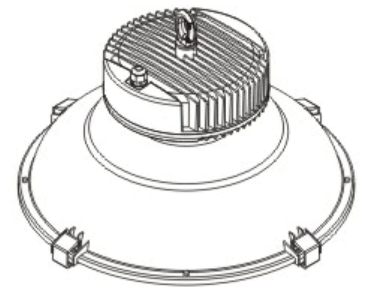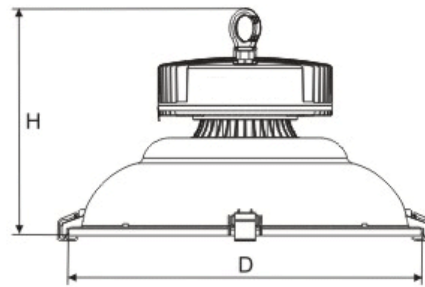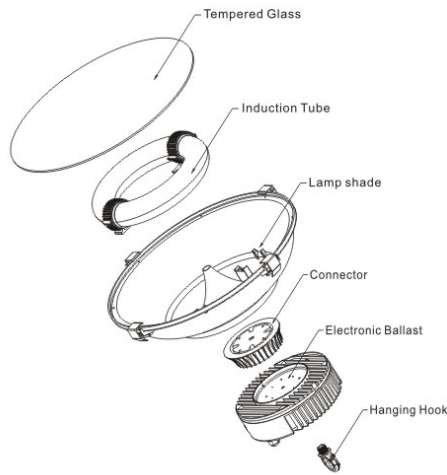

Model S C	Power (W)	D (mm)	H (mm)
DH-EL228G A	40-60	Ø358	289
DH-EL228G B	80-100	Ø 99	289
DH-EL228G C	120-150	Ø478	312
DH-EL228G D	200	Ø506	320
DH-EL228G E	250-300	Ø556	331


Installation Diagram :



Hanging chain installation




Hanging tube mounting



Wall mounting

Light Distribution Curve:



Technical Data



Product	DH-EL228 G Tempered Glass - High Bay Lamp Series								
Wattage (W)	40	60	80	100	120	150	200	250	300
Model Size Category	DH-EL228G A		DH-EL228G B		DH-EL228G C		DH-EL228G D	DH-EL228G E	
Luminous Flux (Im)	2800	4500	6400	8000	9600	12000	16000	21250	25550
Voltage (V)	AC100-277V 50Hz/60Hz								
Current 220V (A)	0.2	0.3	0.39	0.49	0.58	0.73	0.96	1.2	1.43
Current 110V (A)	0.4	0.6	0.78	0.98	1.16	1.46	1.92	2.4	2.86
Ballast Consumption (W)	4	5	6	7.5	8.5	10	11.5	13.0	15.0
Power Factor	0.9	0.95			0.98				
Color Temperature	Standard color temperature of 5000K, other -additional- conventional color temperatures to be ordered: 2700K/4000K/6500K								
Ambient Temperature	Standard products working at -25°C / 50°C								
IP Rated	IP66								
Dimming	Timing dimming or dimming external trigger terminal.								
Product Size (mm)	Ø358 X 289		Ø399 X 289		Ø478 X 312		Ø506 X 320	Ø556 X 331	
Carton Size (cm)	42 X 42 X 31		46 X 46 X 31		53 X 53 X 33		56.5X56X34.5	63 X 63 X 35	
Net Weight (kg)	5	7	5.6	5.7	5.87	5.87	7.45	9.6	9.6
Gross Weight (kg)	5	7	7.8	7.8	8.4	8.4	9.78	11.7	11.7
Model No.	DH-EL228-G04	DH-EL228-G06	DH-EL228-G08	DH-EL228-G10	DH-EL228-G12	DH-EL228-G15	DH-EL228-G20	DH-EL228-G25	DH-EL228-G30



Wyde Loyal Development Ltd.

Los Angeles, CA

Seattle, WA




Vancouver, BC

Mexico, DF

US & Canada: 13160 Vanier Pl. unit 160 / Richmond BC / V6V 2J2 / Canada / website: www.wideloyal.com / Mexico: (55) 5351-5339
1888-303-0931 (Toll Free). +1 (604) 303-0931 Fax +1 (604) 303-0932


High Bay Lamp DH-EL068P (A,B,C) with Polycarbonate Cover and Nano-coating Reflector

Lamp Size Unit: (mm)

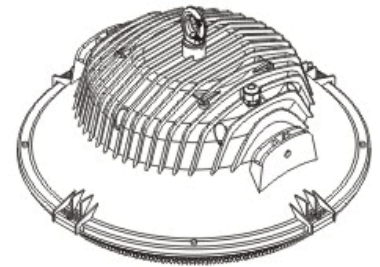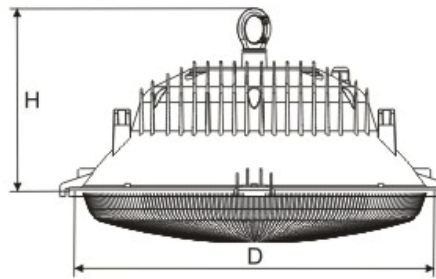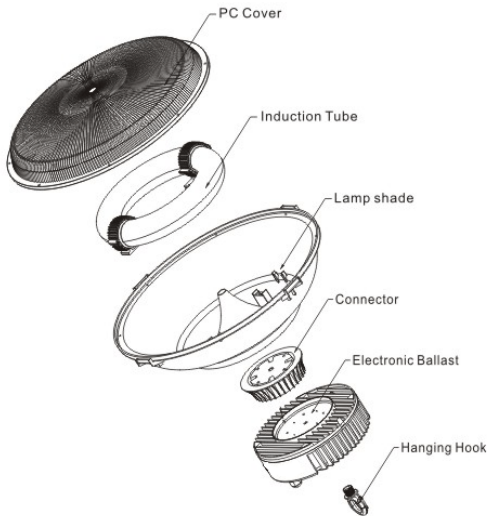


Model	Power (W)	D (mm)	H (mm)
DH-EL068P A	40-60	Ø360	310
DH-EL068P B	80-100	Ø400	300
DH-EL068P C	120-200	Ø507	322


Installation Diagram :



Hanging chain installation




Hanging tube mounting



Wall mounting

Light Distribution Curve:

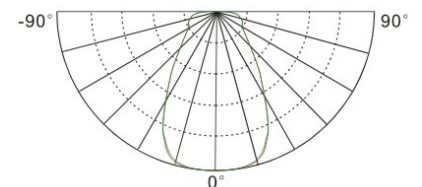

Technical Data



Product	DH-EL068P Polycarbonate Cover - High Bay Lamp Series						
Wattage (W)	40	60	80	100	120	150	200
Model Size Category	DH-EL068P A		DH-EL068P B		DH-EL068P C		
Luminous Flux (Im)	2800	4500	6400	8000	9600	12000	16000
Voltage (V)	AC100-277V 50Hz/60Hz						
Current 220V (A)	0.2	0.3	0.39	0.49	0.58	0.73	0.96
Current 110V (A)	0.4	0.6	0.78	0.98	1.16	1.46	1.92
Ballast Consumption (W)	4	5	6	7.5	8.5	10	11.5
Power Factor	0.9		0.95		0.98		
Color Temperature	Standard color temperature of 5000K, other -additional- conventional color temperatures to be ordered: 2700K/4000K/6500K						
Ambient Temperature	Standard products working at -25°C / 50°C						
IP Rated	IP66						
Dimming	Timing dimming or dimming external trigger terminal.						
Product Size (mm)	Ø360 X 310		Ø400 X 300		Ø507 X 322		
Carton Size (cm)	42 X 42 X 33		46 X 46 X 29.5		53.5 X 53.5 X 31		
Net Weight (kg)	6	6	6.3	6.3	6.7	6.7	6.8
Gross Weight (kg)	7.5	7.5	7.8	7.8	8.2	8.2	8.3
Model No.	DH-EL068-P04	DH-EL068-P06	DH-EL068-P08	DH-EL068-P10	DH-EL068-P12	DH-EL068-P15	DH-EL068-P20



Wyde Loyal Development Ltd.

Los Angeles, CA

Seattle, WA




Vancouver, BC

Mexico, DF

US & Canada: 13160 Vanier Pl. unit 160 / Richmond BC / V6V 2J2 / Canada / website: www.wideloyal.com / Mexico: (55) 5351-5339
1888-303-0931 (Toll Free). +1 (604) 303-0931 Fax +1 (604) 303-0932


High Bay Lamp DH-EL226T (A,B,C,D) with Transparent Polycarbonate Cover and Vacuum-metalized Reflector

Lamp Size Unit: (mm)

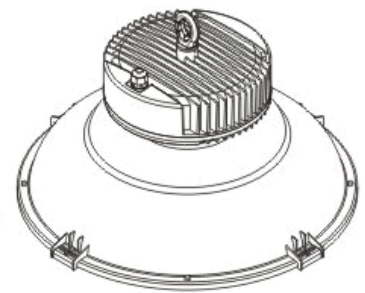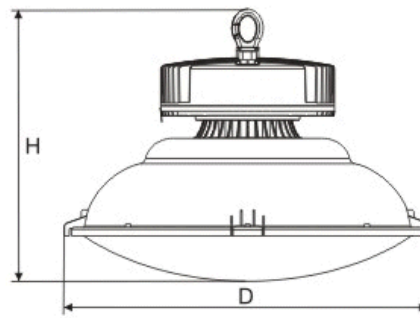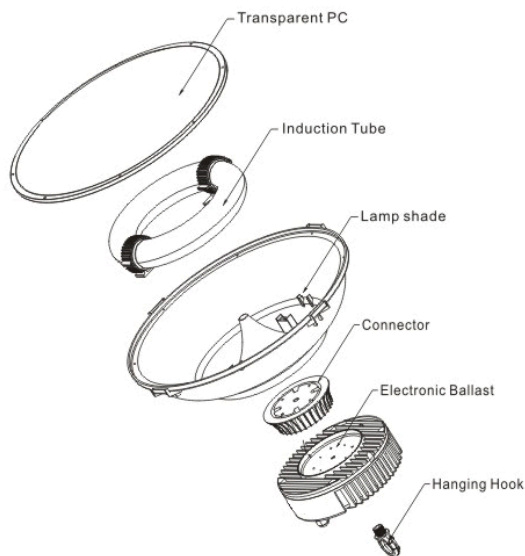

Model S C	Power (W)	D (mm)	H (mm)
DH-EL226T A	40-60	Ø359	351
DH-EL226T B	80-100	Ø399	351
DH-EL226T C	120-150	Ø478	372
DH-EL226T D	200	Ø506	385


Installation Diagram :



Hanging chain installation




Hanging tube mounting



Wall mounting

Light Distribution Curve:

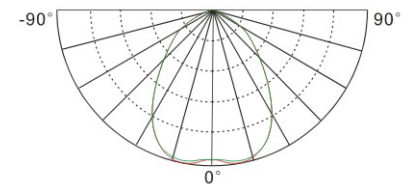

Technical Data



Product	DH-EL226 T Transparent Polycarbonate Cover - High Bay Lamp Series						
Wattage (W)	40	60	80	100	120	150	200
Model Size Category	DH-EL226T A		DH-EL226T B		DH-EL226T C		DH-EL226T D
Luminous Flux (Im)	2800	4500	6400	8000	9600	12000	16000
Voltage (V)	AC100-277V 50Hz/60Hz						
Current 220V (A)	0.2	0.3	0.39	0.49	0.58	0.73	0.96
Current 110V (A)	0.4	0.6	0.78	0.98	1.16	1.46	1.92
Ballast Consumption (W)	4	5	6	7.5	8.5	10	11.5
Power Factor	0.9		0.95		0.98		
Color Temperature	Standard color temperature of 5000K, other -additional- conventional color temperatures to be ordered: 2700K/4000K/6500K						
Ambient Temperature	Standard products working at -25°C / 50°C						
IP Rated	IP66						
Dimming	Timing dimming or dimming external trigger terminal.						
Product Size (mm)	Ø358 X 351		Ø399 X 351		Ø478 X 372		Ø506 X 385
Carton Size (cm)	42 X 42 X 39		46 X 46 X 39		53.5 X 53.5 X 42		54 X 54 X 42
Net Weight (kg)	5	5	5.6	5.7	5.87	5.87	7.45
Gross Weight (kg)	7	7	7.8	7.8	8.4	8.4	9.78
Model No.	DH-EL226-T04	DH-EL226-T06	DH-EL226-T08	DH-EL226-T10	DH-EL226-T12	DH-EL226-T15	DH-EL226-T20



Wyde Loyal Development Ltd.

Los Angeles, CA

Seattle, WA



Vancouver, BC

Mexico, DF

US & Canada: 13160 Vanier Pl. unit 160 / Richmond BC / V6V 2J2 / Canada / website: www.wideloyal.com / Mexico: (55) 5351-5339
1888-303-0931 (Toll Free). +1 (604) 303-0931 Fax +1 (604) 303-0932


High Bay Lamp DH-EL226G (A,B,C,D,E) with Tempered Glass Cover and Vacuum-metalized Reflector

Lamp Size Unit: (mm)

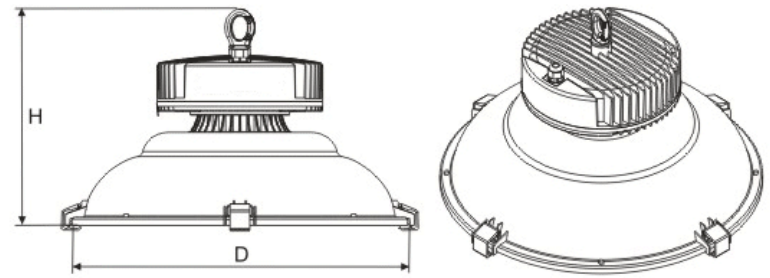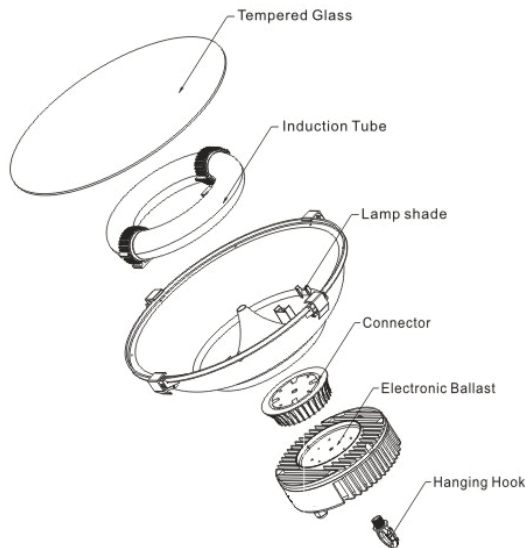

Model S C	Power (W)	D (mm)	H (mm)
DH-EL226G A	40-60	Ø358	289
DH-EL226G B	80-100	Ø399	289
DH-EL226G C	120-150	Ø478	312
DH-EL226G D	200	Ø506	320
DH-EL226G E	250-300	Ø556	331


Installation Diagram :



Hanging chain installation




Hanging tube mounting



Wall mounting

Light Distribution Curve:

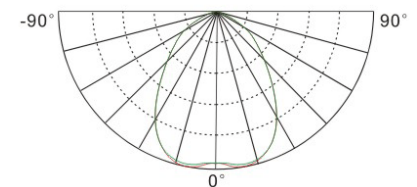

Technical Data



Product	DH-EL226G Tempered Glass - High Bay Lamp Series								
Wattage (W)	40	60	80	100	120	150	200	250	300
Model Size Category	DH-EL226G A		DH-EL226G B		DH-EL226G C		DH-EL226G D	DH-EL226G E	
Luminous Flux (Im)	2800	4500	6400	8000	9600	12000	16000	21250	25550
Voltage (V)	AC100-277V 50Hz/60Hz								
Current 220V (A)	0.2	0.3	0.39	0.49	0.58	0.73	0.96	1.2	1.43
Current 110V (A)	0.4	0.6	0.78	0.98	1.16	1.46	1.92	2.4	2.86
Ballast Consumption (W)	4	5	6	7.5	8.5	10	11.5	13.0	15.0
Power Factor	0.9	0.95			0.98				
Color Temperature	Standard color temperature of 5000K, other -additional- conventional color temperatures to be ordered: 2700K/4000K/6500K								
Ambient Temperature	Standard products working at -25°C / 50°C								
IP Rated	IP66								
Dimming	Timing dimming or dimming external trigger terminal.								
Product Size (mm)	Ø358 X 289		Ø399 X 289		Ø478 X 312		Ø506 X 320	Ø5556 X 331	
Carton Size (cm)	42 X 42 X 31		46 X 46 X 31		53.5X53.5X33		56.5X56X34.5	63 X 63 X 35	
Net Weight (kg)	5	7	5.6	5.7	5.87	5.87	7.45	9.6	9.6
Gross Weight (kg)	5	7	7.8	7.8	8.4	8.4	9.78	11.7	11.7
Model No.	DH-EL226-G04	DH-EL226-G06	DH-EL226-G08	DH-EL226-G10	DH-EL226-G12	DH-EL226-G15	DH-EL226-G20	DH-EL226-G25	DH-EL226-G30



Wyde Loyal Development Ltd.

Los Angeles, CA

Seattle, WA




Vancouver, BC

Mexico, DF

US & Canada: 13160 Vanier Pl. unit 160 / Richmond BC / V6V 2J2 / Canada / website: www.wideloyal.com / Mexico: (55) 5351-5339
1888-303-0931 (Toll Free). +1 (604) 303-0931 Fax +1 (604) 303-0932


High Bay Lamp DH-EL066G (A,B,C,D) with Tempered Glass Cover and Vacuum-metalized Reflector

Lamp Size Unit: (mm)

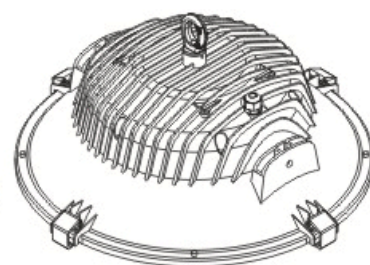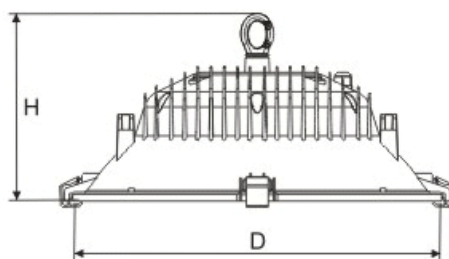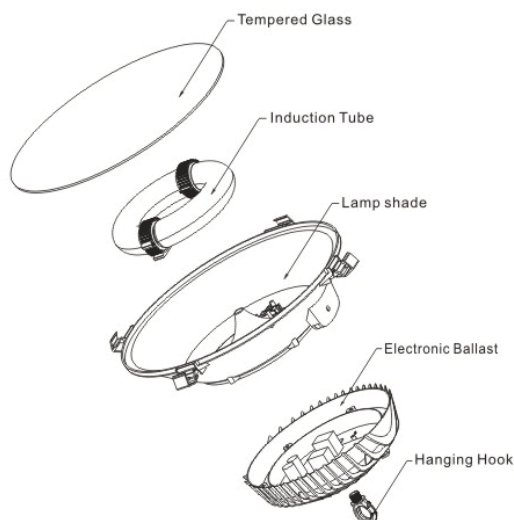


Model	Power (W)	D (mm)	H (mm)
DH-EL066G A	40-60	Ø360	247
DH-EL066G B	80-100	Ø400	237
DH-EL066G C	120-200	Ø507	256
DH-EL066G D	250-300	Ø556	281


Installation Diagram :



Hanging chain installation




Hanging tube mounting



Wall mounting

Light Distribution Curve:

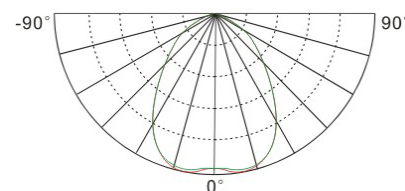

Technical Data



Product	DH-EL066G Tempered Glass - High Bay Lamp Series								
Wattage (W)	40	60	80	100	120	150	200	250	300
Model Size Category	DH-EL066 A		DH-EL066 B		DH-EL066 C			DH-EL066 D	
Luminous Flux (Im)	2800	4500	6400	8000	9600	12000	16000	21250	25550
Voltage (V)	AC100-277V 50Hz/60Hz								
Current 220V (A)	0.2	0.3	0.39	0.49	0.58	0.73	0.96	1.2	1.43
Current 110V (A)	0.4	0.6	0.78	0.98	1.16	1.46	1.92	2.4	2.86
Ballast Consumption (W)	4	5	6	7.5	8.5	10	11.5	13	15
Power Factor	0.9		0.95		0.98				
Color Temperature	Standard color temperature of 5000K, other -additional- conventional color temperatures to be ordered: 2700K/4000K/6500K								
Ambient Temperature	Standard products working at -25°C / 50°C								
IP Rated	IP66								
Dimming	Timing dimming or dimming external trigger terminal.								
Product Size (mm)	Ø360 X 247		Ø400 X 237		Ø507 X 256			Ø556 X 281	
Carton Size (cm)	42 X 42 X 36		46 X 46 X 31		57 X 57 X 37			62 X 62 X 61	
Net Weight (kg)	6	6	6.3	6.3	6.7	6.7	6	6	6.3
Gross Weight (kg)	7.5	7.5	7.8	7.8	8.2	8.2	7.5	7.5	7.8
Model No.	DH-EL066-G04	DH-EL066-G06	DH-EL066-G08	DH-EL066-G10	DH-EL066-G12	DH-EL066-G15	DH-EL066-G20	DH-EL066-G25	DH-EL066-G30



Wyde Loyal Development Ltd.

Los Angeles, CA

Seattle, WA




Vancouver, BC

Mexico, DF

US & Canada: 13160 Vanier Pl. unit 160 / Richmond BC / V6V 2J2 / Canada / website: www.wideloyal.com / Mexico: (55) 5351-5339
1888-303-0931 (Toll Free). +1 (604) 303-0931 Fax +1 (604) 303-0932


High Bay Lamp DH-EL066T (A,B,C) with Transparent Polycarbonate Cover and Vacuum-metalized Reflector

Lamp Size Unit: (mm)

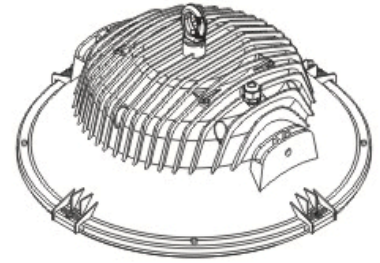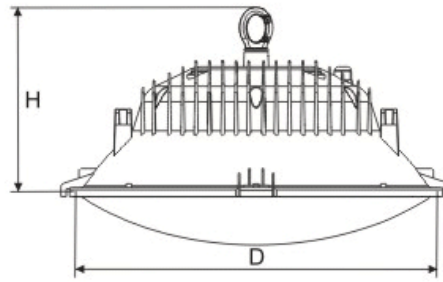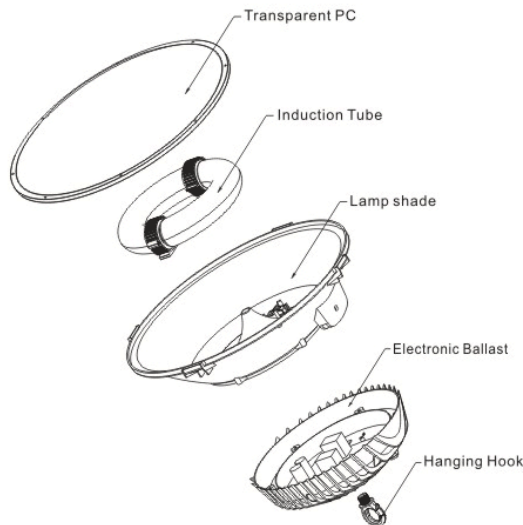


Model	Power (W)	D (mm)	H (mm)
DH-EL066T A	40-60	Ø360	247
DH-EL068T B	80-100	Ø400	237
DH-EL068T C	120-200	Ø507	256


Installation Diagram :



Hanging chain installation




Hanging tube mounting

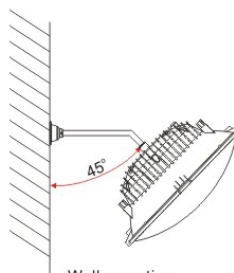

Wall mounting

Light Distribution Curve:

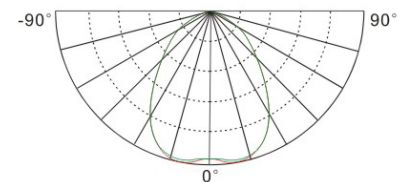

Technical Data



Product	DH-EL066T Transparent PC - High Bay Lamp Series						
Wattage (W)	40	60	80	100	120	150	200
Model Size Category	DH-EL066T A		DH-EL066T B		DH-EL066T C		
Luminous Flux (Im)	2800	4500	6400	8000	9600	12000	16000
Voltage (V)	AC100-277V 50Hz/60Hz						
Current 220V (A)	0.2	0.3	0.39	0.49	0.58	0.73	0.96
Current 110V (A)	0.4	0.6	0.78	0.98	1.16	1.46	1.92
Ballast Consumption (W)	4	5	6	7.5	8.5	10	11.5
Power Factor	0.9		0.95		0.98		
Color Temperature	Standard color temperature of 5000K, other -additional- conventional color temperatures to be ordered: 2700K/4000K/6500K						
Ambient Temperature	Standard products working at -25°C / 50°C						
IP Rated	IP66						
Dimming	Timing dimming or dimming external trigger terminal.						
Product Size (mm)	Ø360 X 310		Ø400 X 300		Ø507 X 322		
Carton Size (cm)	42 X 42 X 36		46 X 46 X 36		57 X 57 X 37		
Net Weight (kg)	6	6	6.3	6.3	6.7	6.7	6.8
Gross Weight (kg)	7.5	7.5	7.8	7.8	8.2	8.2	8.3
Model No.	DH-EL066-T04	DH-EL066-T06	DH-EL066-T08	DH-EL066-T10	DH-EL066-T12	DH-EL066-T15	DH-EL066-T20



Wyde Loyal Development Ltd.

Los Angeles, CA

Seattle, WA




Vancouver, BC

Mexico, DF

US & Canada: 13160 Vanier Pl. unit 160 / Richmond BC / V6V 2J2 / Canada / website: www.wideloyal.com / Mexico: (55) 5351-5339
1888-303-0931 (Toll Free). +1 (604) 303-0931 Fax +1 (604) 303-0932


High Bay Lamp DH-EL068G (A,B,C,D) with Tempered Glass Cover and Nano-coating Reflector

Lamp Size Unit: (mm)

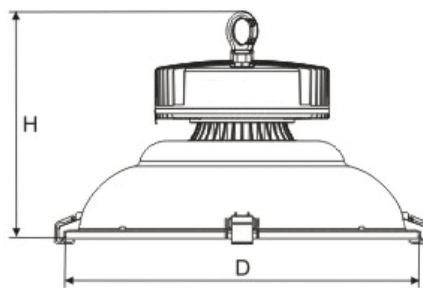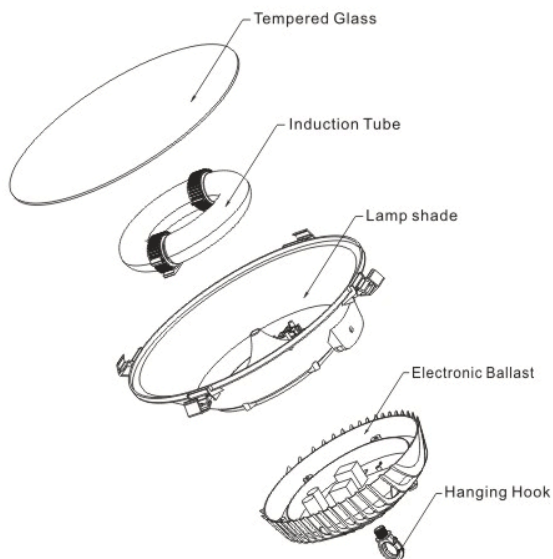


Model	Power (W)	D (mm)	H (mm)
DH-EL068G A	40-60	Ø360	247
DH-EL068G B	80-100	Ø400	237
DH-EL068G C	120-200	Ø507	256
DH-EL068G D	250-300	Ø556	281


Installation Diagram :



Hanging chain installation




Hanging tube mounting



Wall mounting

Light Distribution Curve:

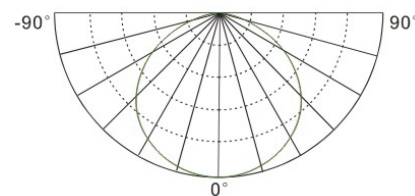

Technical Data



Product	DH-EL068G Tempered Glass - High Bay Lamp Series								
Wattage (W)	40	60	80	100	120	150	200	250	300
Model Size Category	DH-EL068G A		DH-EL068G B		DH-EL068G C			DH-EL068G D	
Luminous Flux (Im)	2800	4500	6400	8000	9600	12000	16000	21250	25550
Voltage (V)	AC100-277V 50Hz/60Hz								
Current 220V (A)	0.2	0.3	0.39	0.49	0.58	0.73	0.96	1.2	1.43
Current 110V (A)	0.4	0.6	0.78	0.98	1.16	1.46	1.92	2.4	2.86
Ballast Consumption (W)	4	5	6	7.5	8.5	10	11.5	13	15
Power Factor	0.9		0.95		0.98				
Color Temperature	Standard color temperature of 5000K, other -additional- conventional color temperatures to be ordered: 2700K/4000K/6500K								
Ambient Temperature	Standard products working at -25°C / 50°C								
IP Rated	IP66								
Dimming	Timing dimming or dimming external trigger terminal.								
Product Size (mm)	Ø360 X 247		Ø400 X 237		Ø507 X 256			Ø556 X 281	
Carton Size (cm)	42 X 42 X 36		47 X 47 X 26		56.5 X 56.5 X 27			63 X 63 X 30	
Net Weight (kg)	6	6	6.3	6.3	6.7	6.7	6.8	7	7
Gross Weight (kg)	7.5	7.5	7.8	7.8	8.2	8.2	8.3	8.5	8.8
Model No.	DH-EL068-G04	DH-EL068-G06	DH-EL068-G08	DH-EL068-G10	DH-EL068-G12	DH-EL068-G15	DH-EL068-G20	DH-EL068-G25	DH-EL068-G30



Wyde Loyal Development Ltd.

Los Angeles, CA

Seattle, WA




Vancouver, BC

Mexico, DF

US & Canada: 13160 Vanier Pl. unit 160 / Richmond BC / V6V 2J2 / Canada / website: www.wideloyal.com / Mexico: (55) 5351-5339
1888-303-0931 (Toll Free). +1 (604) 303-0931 Fax +1 (604) 303-0932


High Bay Lamp DH-EL068T (A,B,C) with Transparent Polycarbonate Cover and Nano-coating Reflector

Lamp Size Unit: (mm)

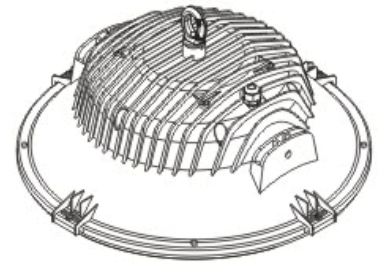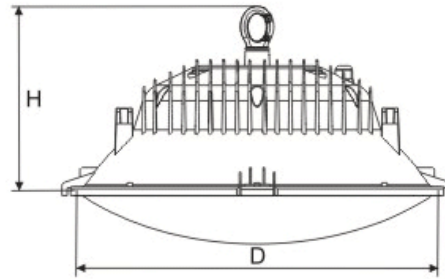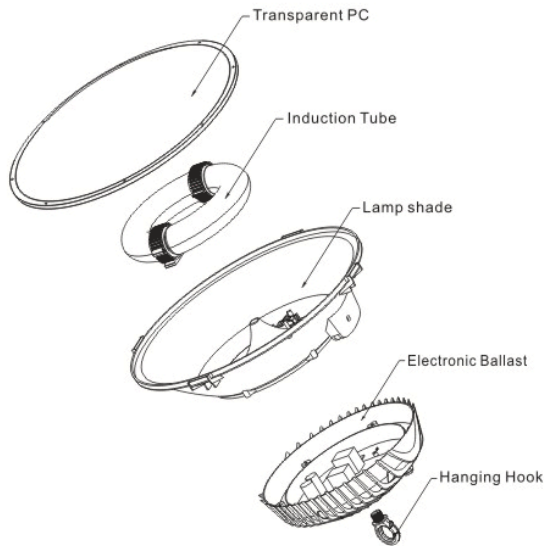


Model	Power (W)	D (mm)	H (mm)
DH-EL068T A	40-60	Ø360	310
DH-EL068T B	80-100	Ø400	300
DH-EL068T C	120-200	Ø507	322


Installation Diagram :



Hanging chain installation




Hanging tube mounting



Wall mounting

Light Distribution Curve:

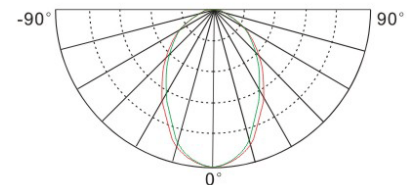

Technical Data

Product	DH-EL068T Transparent PC - High Bay Lamp Series						
Wattage (W)	40	60	80	100	120	150	200
Model Size Category	DH-EL068T A		DH-EL068T B		DH-EL068T C		
Luminous Flux (Im)	2800	4500	6400	8000	9600	12000	16000
Voltage (V)	AC100-277V 50Hz/60Hz						
Current 220V (A)	0.2	0.3	0.39	0.49	0.58	0.73	0.96
Current 110V (A)	0.4	0.6	0.78	0.98	1.16	1.46	1.92
Ballast Consumption (W)	4	5	6	7.5	8.5	10	11.5
Power Factor	0.9		0.95		0.98		
Color Temperature	Standard color temperature of 5000K, other -additional- conventional color temperatures to be ordered: 2700K/4000K/6500K						
Ambient Temperature	Standard products working at -25°C / 50°C						
IP Rated	IP66						
Dimming	Timing dimming or dimming external trigger terminal.						
Product Size (mm)	Ø360 X 310		Ø400 X 300		Ø507 X 322		
Carton Size (cm)	42 X 42 X 36		46 X 46 X 36		57 X 57 X 37		
Net Weight (kg)	6	6	6.3	6.3	6.7	6.7	6.8
Gross Weight (kg)	7.5	7.5	7.8	7.8	8.2	8.2	8.3
Model No.	DH-EL068-T04	DH-EL068-T06	DH-EL068-T08	DH-EL068-T10	DH-EL068-T12	DH-EL068-T15	DH-EL068-T20



Wyde Loyal Development Ltd.

Los Angeles, CA

Seattle, WA

Vancouver, BC

Mexico, DF

US & Canada: 13160 Vanier Pl. unit 160 / Richmond BC / V6V 2J2 / Canada / website: www.wideloyal.com / Mexico: (55) 5351-5339
1888-303-0931 (Toll Free). +1 (604) 303-0931 Fax +1 (604) 303-0932

