

winxo

FULL GAS STATION LIGHTING SOLUTIONS



WIDE LOYAL
MANUFACTURE AND DISTRIBUTION

Wide Loyal offers the following components in a versatile LED kit to enhance your service station's visibility!

LED Canopy Lamp



Undercanopy lighting for an efficient, clean and sleek effect.

LED Fuel Price Display



Latest LED technology that allows your station to be noticed from the street in any weather conditions.

LED Striplight PRO



Super-bright, commercial grade striplights to replace tube lamps in gas station signage.

LED Area Lights



Modern, efficient, and appealing lighting solutions for parking and other service station outdoor areas.

Wide Loyal Developments Ltd. • Los Angeles, CA • Seattle, WA • Vancouver, BC

US & Canada: 1-888-303-0931 (Toll Free) Fax: 1-888-303-0932 www.wideloyal.com e-mail: sales@wideloyal.com

LED Canopy Lamp

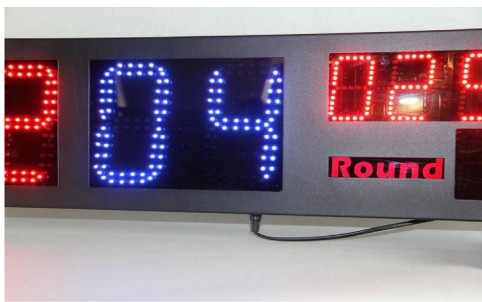
TECHNICAL SPECIFICATIONS				
Item Number	Picture	Specifications		
LCP-CK01	  	Voltage	100-277V 50/60Hz	
		Wattage	40W	60W
		Luminous Flux	4000Lm	5520Lm
		CCT	2700/3000/4000/5000/6500K	
		CRI	>75	
		Power Factor	>0.92	
		THD	<15%	
		Lifespan	50,000 Hours	
		Ambient Temperature	-40°C ~ 40°C	
		Installation	Ceiling Mount	
		IP Rating	IP65	
		Dimension	355*355*135mm	
		Weight	4.2Kg	4.8Kg
			5.3Kg	5.6Kg
LCP-CK03	  	Voltage	100-277V 50/60Hz	
		Wattage	40W	60W
		Luminous Flux	4000Lm	5520Lm
		CCT	2700/3000/4000/5000/6500K	
		CRI	>75	
		Power Factor	>0.92	
		THD	<15%	
		Lifespan	50,000 Hours	
		Ambient Temperature	-40°C ~ 40°C	
		Installation	Ceiling Mount	
		IP Rating	IP66	
		Dimension	Ø385*288mm	
		Weight	3.6Kg	4.3Kg
			4.6Kg	4.9Kg
LCP-CK08	  	Voltage	100-277V 50/60Hz	
		Wattage	80W	100W
		Luminous Flux	8087Lm	12493Lm
		CCT	2700/3000/4000/5000/6500K	
		CRI	>75	
		Power Factor	>0.92	
		THD	<15%	
		Lifespan	50,000 Hours	
		Ambient Temperature	-40°C ~ 40°C	
		Installation	Recessed	
		IP Rating	IP65	
		Dimension	400*242*99mm	400*321*99mm
		Weight	9.53Kg	12.64Kg
			15.75Kg	
LCP-CK09	  	Voltage	100-277V 50/60Hz	
		Wattage	60W	80W
		Luminous Flux	4000Lm	5520Lm
		CCT	2700/3000/4000/5000/6500K	
		CRI	>75	
		Power Factor	>0.92	
		THD	<15%	
		Lifespan	50,000 Hours	
		Ambient Temperature	-40°C ~ 40°C	
		Installation	Ceiling Mount	
		IP Rating	IP65	
		Dimension	Ø350*300mm	
		Weight	5.3Kg	5.6Kg
			5.9Kg	
LCP-CK11	  	Voltage	100-277V 50/60Hz	
		Wattage	80W	100W
		Luminous Flux	7600Lm	9000Lm
		CCT	2700/3000/4000/5000/6500K	
		CRI	>75	
		Power Factor	>0.92	
		THD	<15%	
		Lifespan	50,000 Hours	
		Ambient Temperature	-40°C ~ 40°C	
		Installation	Ceiling Mount	
		IP Rating	IP65	
		Dimension	355*355*135mm	
		Weight	6.9Kg	7.8Kg
			8.5Kg	
LCP-CKB1	  	Voltage	100-277V 50/60Hz	
		Wattage	80W	100W
		Luminous Flux	7600Lm	9000Lm
		CCT	2700/3000/4000/5000/6500K	
		CRI	>75	
		Power Factor	>0.92	
		THD	<15%	
		Lifespan	50,000 Hours	
		Ambient Temperature	-40°C ~ 40°C	
		Installation	Recessed	
		IP Rating	IP65	
		Dimension	440*420*95mm	
		Weight	7.6Kg	8.2Kg
			8.9Kg	



Wide Loyal Developments Ltd. • Los Angeles, CA • Seattle, WA • Vancouver, BC

US & Canada: 1-888-303-0931 (Toll Free) Fax: 1-888-303-0932 www.wideloyal.com e-mail: sales@wideloyal.com

LED Fuel Price Display

TECHNICAL SPECIFICATIONS		
Item Number	LS-DD023W	LS-BD023W
Picture		
Descriptions	LED Dot-Matrix Display	LED Bars Display
Dimension	120cm*50cm*7cm	120cm*50cm*7cm
Format	Numeric 88.88 Programable	Numeric 88.88 Programable
Light Source	LED	LED
CCT	6000K-6500K	6000K-6500K
Luminous Flux	7000 mcd	7000 mcd
IP Rating	IP65	IP65
Voltage	12V DC	12V DC
Wattage	75W	75W



Model: LS-BD023W

LED Fuel Price Display

Dimensions: 120cm x 50cm x 7cm
 Format: Numeric 88.88 Programmable
 Light source: LED White 6000K-6500K
 Luminous Flux: 7000 mcd
 Display Background: Black
 IP Rating: IP65
 Voltage: 12V DC
 Wattage: 75W



Wide Loyalty Developments Ltd. • Los Angeles, CA • Seattle, WA • Vancouver, BC

US & Canada: 1-888-303-0931 (Toll Free) Fax: 1-888-303-0932 www.wideloyal.com e-mail: sales@wideloyal.com

LED Striplight PRO

Technical Specifications		
Item Number	LD-5165	
Voltage	120V	
Wattage	14.4W/m	
Wire Gauge	20 AWG	
LED Colors	(A) Warm White 3000K (N) Natural White 4000K (D) Daylight 5000K (W) Cool White 6500K (R) Red (Y) Yellow	(G) Green (B) Blue (O) Orange (P) Pink (L) Purple
LED Quantity	60 LED/m	
LED Type	SMD5050 PRO	
LED Brand	Epistar	
PCB Color	White / Brown	
PCB Coating	Double-Side Anti-Corrosion	
Luminous Flux (60mA)	23 Lm/LED / 1.380 Lm/m	
Luminous Efficacy	110 Lm/W	
Luminous Surface	Ø4.56 mm	
Dimmable	Yes	
IP Code	IP68	
Unit Length	0.5m (20")	
Max Length	100m (328Ft)	
Certificate	RoHS	



Wide Loyalty Developments Ltd. • Los Angeles, CA • Seattle, WA • Vancouver, BC

US & Canada: 1-888-303-0931 (Toll Free) Fax: 1-888-303-0932 www.wideloyal.com e-mail: sales@wideloyal.com

LED Area Lights

TECHNICAL SPECIFICATIONS			
Item Number	Picture	Details	
LH-CK33A		Specifications	
		Voltage	AC 100-240V/277V 50/60Hz
		Wattage	100W
		LED Chip	Philips Luxeon Rebel ES 
		Power Supply	Mean Well
		Luminious Flux	9500Lm +/- 5%
		IP Rating	IP66
		CCT	2700-6500K
		CRI	>75
		PF	>0.92
		THD	<15%
		Finish	Silver, Black
		Dimensions	
		Fixture Info	577*316*136mm, 7.3Kg
		Aperture Diameter	Φ60 mm
Packing Info	630*370*200mm, 8.6Kg		
Remarks			
Certifications	UL ETL RoHS DLC FCC		
Standards	LM-79 LM-80		
Warranty	2 Years		
LH-CK34A		Specifications	
		Voltage	AC 100-240V/277V 50/60Hz
		Wattage	135W
		LED Chip	Philips Luxeon Rebel ES 
		Power Supply	Mean Well
		Luminious Flux	12825Lm +/- 5%
		IP Rating	IP66
		CCT	2700-6500K
		CRI	>75
		PF	>0.92
		THD	<15%
		Finish	Silver, Black
		Dimensions	
		Fixture Info	650*316*136mm, 8.2Kg
		Aperture Diameter	Φ60 mm
Packing Info	705*370*200mm, 9.6Kg		
Remarks			
Certifications	UL ETL RoHS DLC FCC		
Standards	LM-79 LM-80		
Warranty	2 Years		
LH-CK35A		Specifications	
		Voltage	AC 100-240V/277V 50/60Hz
		Wattage	165W
		LED Chip	Philips Luxeon Rebel ES 
		Power Supply	Mean Well
		Luminious Flux	15675Lm +/- 5%
		IP Rating	IP66
		CCT	2700-6500K
		CRI	>75
		PF	>0.92
		THD	<15%
		Finish	Silver, Black
		Dimensions	
		Fixture Info	723*316*136mm, 9.0Kg
		Aperture Diameter	Φ60 mm
Packing Info	780*370*200mm, 10.6Kg		
Remarks			
Certifications	UL ETL RoHS DLC FCC		
Standards	LM-79 LM-80		
Warranty	2 Years		



Wide Loyal Developments Ltd. • Los Angeles, CA • Seattle, WA • Vancouver, BC

US & Canada: 1-888-303-0931 (Toll Free) Fax: 1-888-303-0932 www.wideloyal.com e-mail: sales@wideloyal.com